



INSTALLATION GUIDE

CTS TURBO TEST PIPE FOR B9 A4
CTS-EXH-TP-0006



WHAT IS INCLUDED

1. test-pipe, or highflow cat
2. install hardware



NOTES

Vehicle used in this guide is a 2019 Audi A4.

Always make sure the car is safe to work on. Do not work on a hot motor.

We do not accept any liability for incorrect installation or damage during the install.

STEP 1

LOCATE THE ENGINE. THE
FACTORY CAT IS LOCATED
ON THE RIGHT SIDE OF THE
ENGINE.

**STEP 2**

REMOVE THE 4 15mm NUTS
SECURING THE CAT TO THE
TURBOCHARGER.



STEP 3

RAISE VEHICLE TO ACCESS
THE LOWER BOLTS ON THE
CAT.




STEP 4

REMOVE THE HANGER BOLTS
FROM THE DOWNPIPE.



STEP 5

NOW REMOVE THE 3 NUTS
HOLDING THE DOWNPIPE TO
THE CAT.

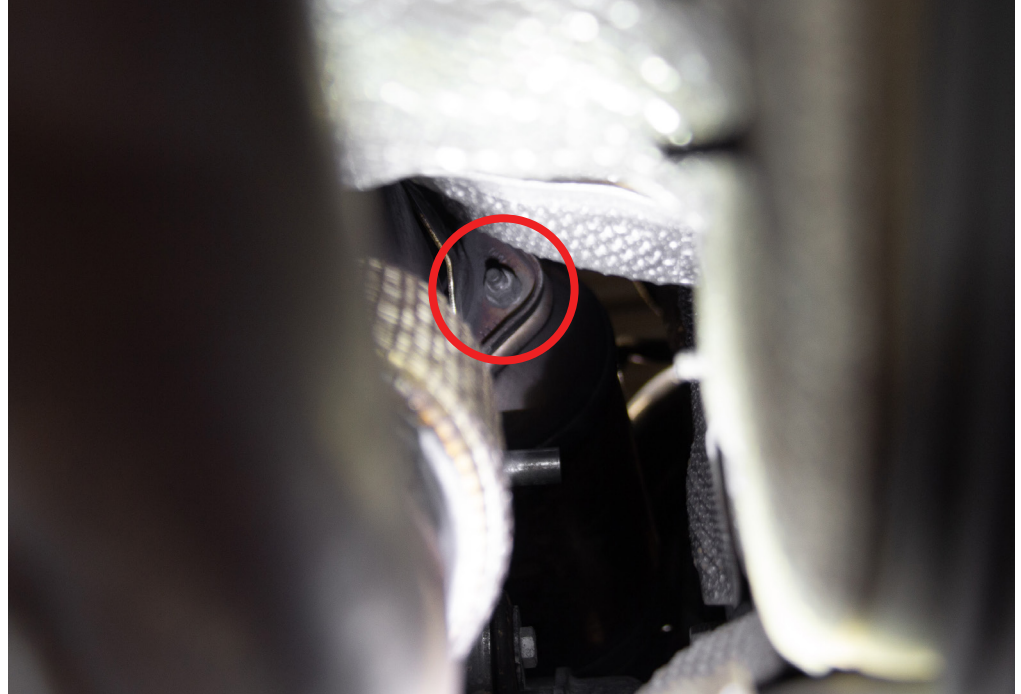**STEP 6**

REMOVE THE DOWNPIPE (THIS
STEP MAKES IT EASIER TO
MANUEVER THE CAT AROUND)



STEP 6

DISCONNECT THE O2 SENSOR HARNESS. WE WILL REMOVE THE CAT WITH THE O2 SENSOR ATTACHED.

YOU CAN ALSO OPT TO REMOVE THE SENSOR IN THE CAR IF YOU FEEL UP TO IT.



STEP 7

TO REMOVE THE CAT, YOU WILL NEED TO PUSH IT BACK TOWARDS THE FIREWALL, AND THEN PULL IT OUT FROM THE DRIVER SIDE REAR OF THE ENGINE

**STEP 8**


NOW WE CAN SWAP THE O2 SENSOR OVER AND RE-INSTALL THE NEW UNIT.



STEP 9

INSTALL THE CTS CAT/TEST
PIPE USING THE SUPPLIED
GASKETS AND HARDWARE.

RE-INSTALL THE DOWNPIPE.

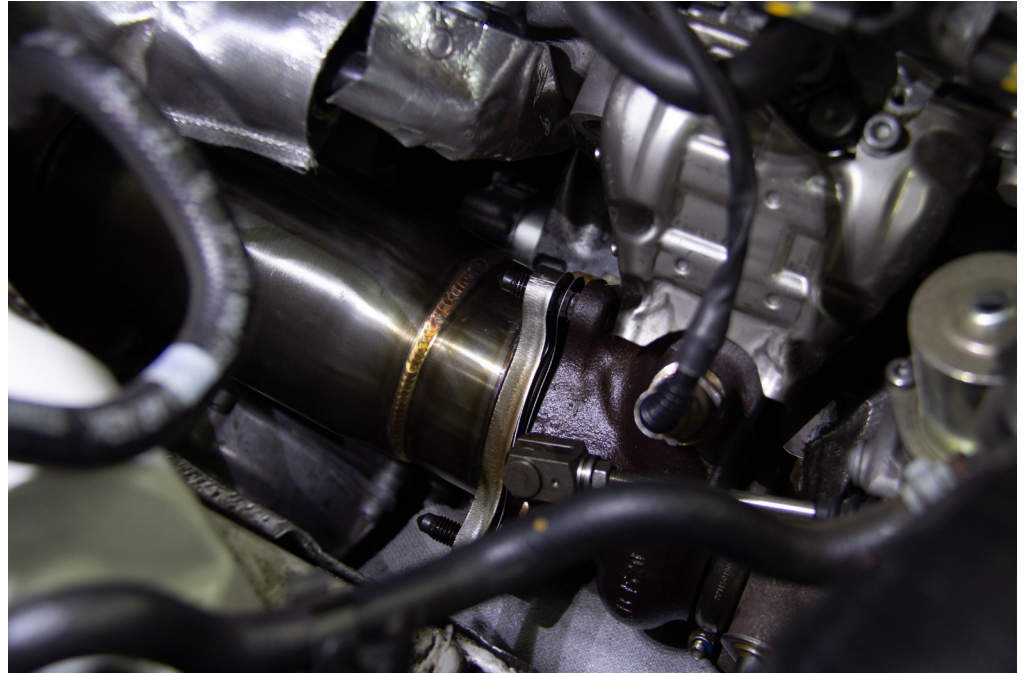

STEP 9

INSTALL THE CTS CAT/TEST
PIPE USING THE SUPPLIED
GASKETS AND HARDWARE.

RE-INSTALL THE DOWNPIPE.

